

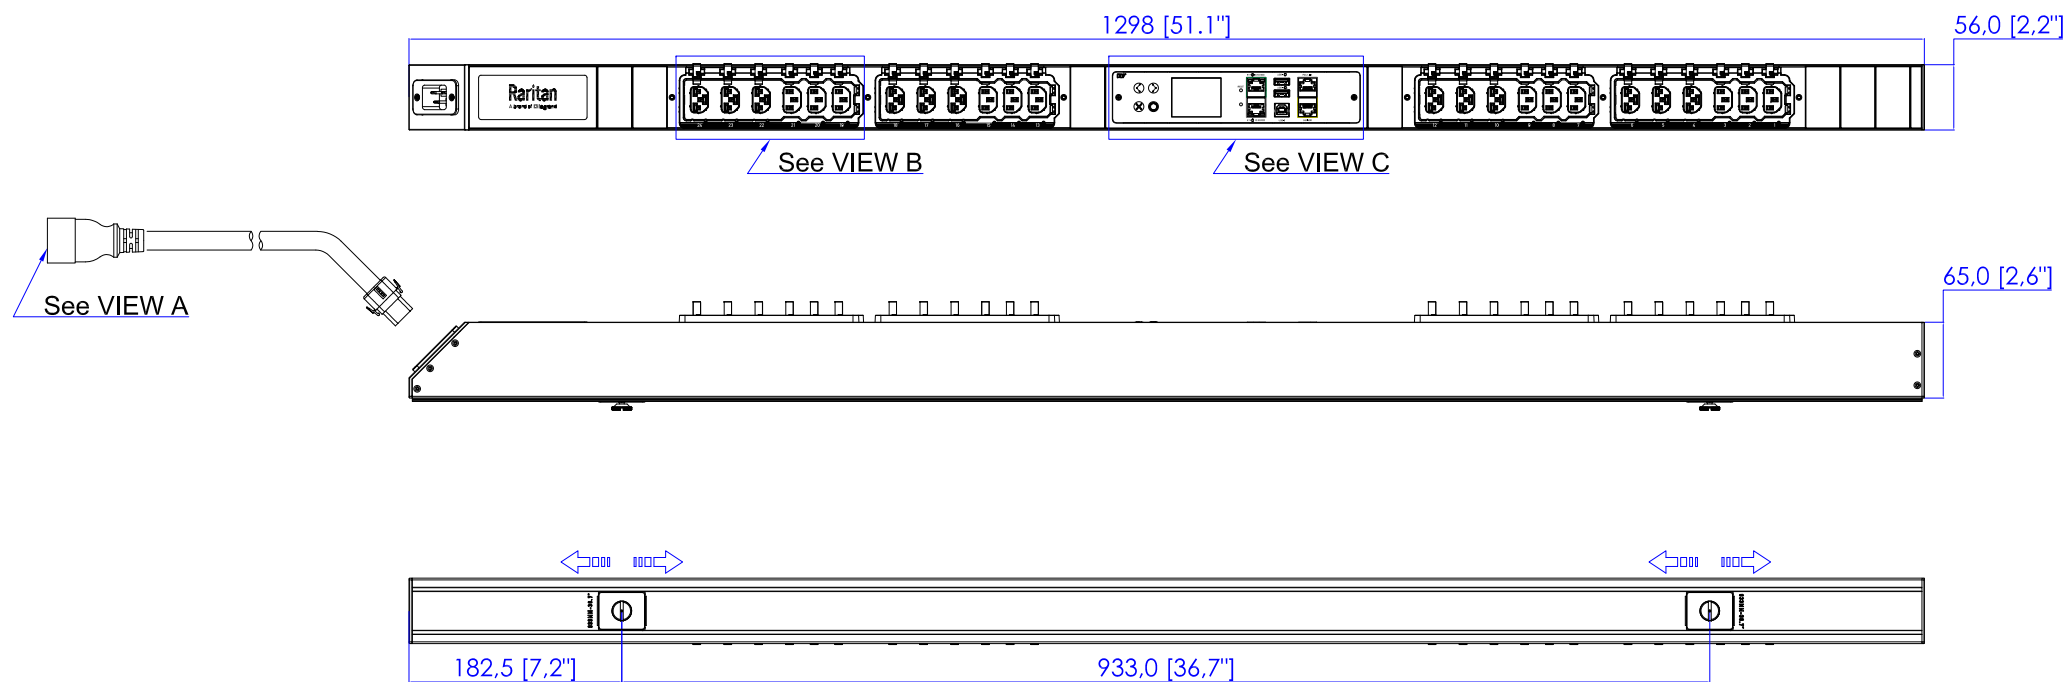
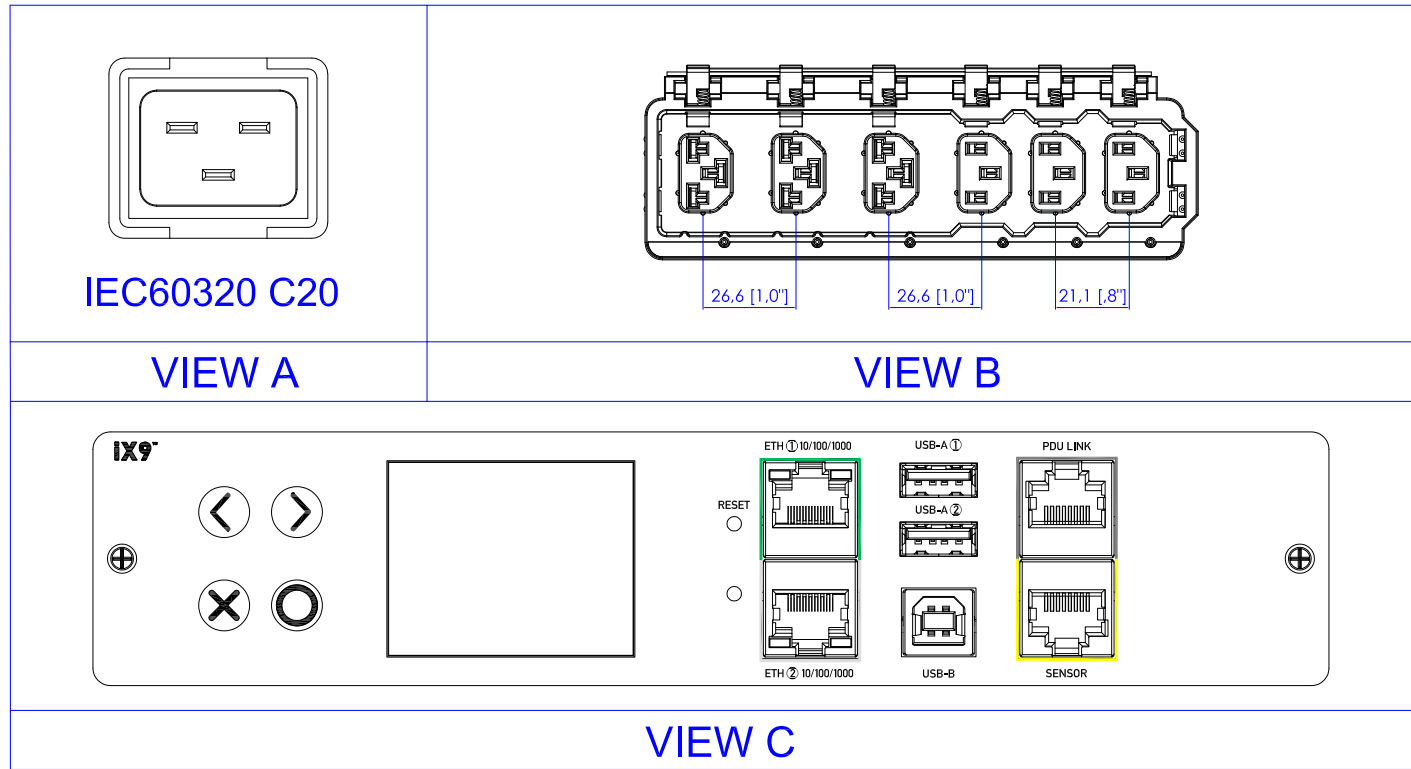


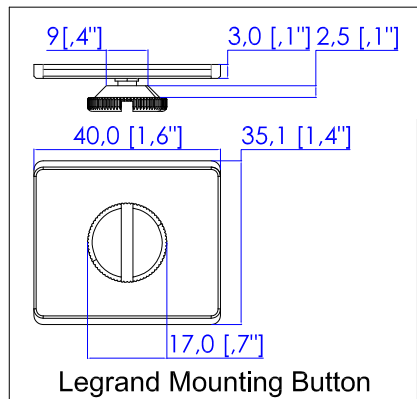

- NOTES:
1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
 2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).
 4. MOUNTING BUTTON IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR 3RD PARTY ENCLOSURE. BUTTON IS PROVIDED WITH THE UNIT. DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE PROVIDED MANUAL.
 5. BRACKET KITS TO MOUNT TO SPECIFIC 3RD PARTY ENCLOSURES ARE AVAILABLE AS OPTIONS.
 6. RARITAN STANDARD LENGTH OF THE CORD IS 3000MM+/-70MM
 7. DIMENSION TOLERANCE: LENGTH +/-3MM, WIDTH +/-1MM, DEPTH +/-0.5MM



Raritan® A brand of  legrand®			 PROJECTION THIRD ANGLE	DO NOT SCALE DRAWING	SPECIFICATION iPDU Zero U 100-240V, 16A Inlet Type: IEC60320 C20 Plug Type: IEC60320 C20 Outlet Type: Locking HDOT C13 (12), Locking CX (12)	
				SHEET 1 OF 1		
THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, Inc. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, Inc. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.			DWG NO. MPX4-53A8C-C8E7 & MPX4-53A8C-C8E7M27			
Drawing Maker:	Eva Lin	Oct. 01, 2024				
Design Engineer:	Eva Lin	Oct. 01, 2024				
Approver:	Tom Hsueh	Oct. 01, 2024				
			MODEL NO. PX4-53A8C-C8E7 & PX4-43A8C-C8E7 PX4-53A8C-C8E7M27 & PX4-43A8C-C8E7M27		REV. 0B	